

# DKZ78XX-2000(L) Series

## WIDE INPUT NON-ISOLATED & REGULATED SINGLE OUTPUT

### FEATURES


- Efficiency up to 92%,No heatsink required
- 2A large current output
- Operating temperature : -40°C ~ +85°C
- Short circuit protection, thermal shutdown
- Low ripple and noise
- Micro miniature SIP package, meet UL94-V0 requirement
- Ultra low power loss
- Industry standard pinout
- Pin-out compatible with LM78XX Linear
- MTBE>2000,000Hours

### APPLICATIONS

Upgraded DKZ78xx-2000(L) series switching regulators are ideal replacement for 78xx linear regulators and LDOs. The efficiency of up to 92% means that very little energy is wasted as heat so there is no need for any heat sinks with their additional space and mounting costs. They are widely used in industrial control, instrumentation, and electric power applications.

### MODEL SELECTION

**DKZ-7805 - 2000**

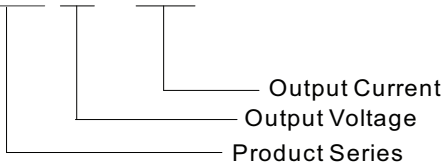

PRODUCT PROGRAM						
Part Number	Input Voltage(VDC)		Output		Efficiency (%) (Typ.)	
	Nominal	Range	Voltage (VDC)	Current (mA)	Vin (min.)	Vin (max.)
DKZ-7801-2000(L)	12	4.75-18	1.5	2000	79	76
DKZ-78X2-2000(L)	12	4.75-18	1.8	2000	81	79
DKZ-7802-2000(L)	12	4.75-18	2.5	2000	85	83
DKZ-7803-2000(L)	12	4.75-18	3.3	2000	87	86
DKZ-7805-2000(L)	12	7-18	5	2000	91	88
DKZ-78X6-2000(L)	12	8.5-18	6.5	2000	92	91

Add suffix "L" for 90° bend pins, for example: DKZ-7805-2000L.


OUTPUT SPECIFICATIONS					
Item	Test conditions	Min.	Typ.	Max.	Units
Output voltage accuracy	100% full load, input voltage range		±2	±3	%
Line regulation	Vin=min. to max, at full load		±0.5	±0.75	
Load regulation	10% to 100% load		±0.5	±1.0	
Ripple & Noise*	20MHz bandwidth (refer to figure 6)		25	45	mVp-p
Short circuit input power			0.5	1.8	W
Short circuit protection		Continuous, auto-recovery			
Thermal shutdown	Internal IC junction		150		°C
Output current limit			5000		mA
Switching frequency	Full load, input voltage range	300	340	380	KHz
Quiescent current			5	10	mA
Temperature coefficient	-40°C ~ +85°C ambient			±0.03	%/°C
Max capacitance load				1000	µF

\*Test ripple and noise by "parallel cable" method.

COMMON SPECIFICATIONS	
Operating temp. range	-40~+85 (above 71°C power derating)
Operating case temp.	+100 I(max)
Storage temp. range	-55~+125 I
Cooling	Free air convection
Lead temperature**	300°C (max)
Storage humidity range	≤ 95%
Case material	Plastic(UL94-V0)
MTBF	> 2000k hours (25°C, MIL-HDBK-217F)
Weight	4.0g
Conducted emissions (Refer to Figure 5)	EN55022 CLASS B
Radiated emissions	EN55022 CLASS B
ESD	EN61000-4-2 Level 3 6kV/8kV perf. Criteria B

\*\*1.5mm from case for 10 seconds


## TYPICAL CHARECTERISTICS

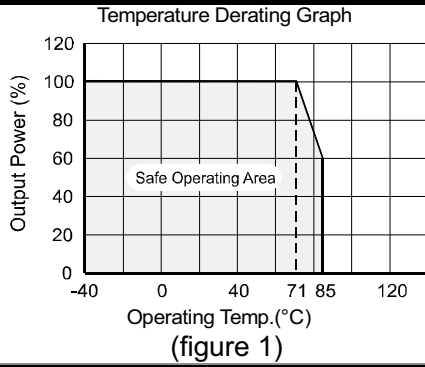

## EXTERNAL CAPACITOR TABLE

Part Number	C1 (Ceramic capacitor)	C2 (Ceramic capacitor)
DKZ-7801-2000(L)	10 $\mu$ F/25V	22 $\mu$ F/6.3V
DK78-ZX2-2000(L)	10 $\mu$ F/25V	22 $\mu$ F/6.3V
DK78-Z02-2000(L)	10 $\mu$ F/25V	22 $\mu$ F/6.3V
DK78-Z03-2000(L)	10 $\mu$ F/25V	22 $\mu$ F/6.3V
DK78-Z05-2000(L)	10 $\mu$ F/25V	22 $\mu$ F/16V
DK78-ZX6-2000(L)	10 $\mu$ F/25V	22 $\mu$ F/16V


## TYPICAL APPLICATION CIRCUIT

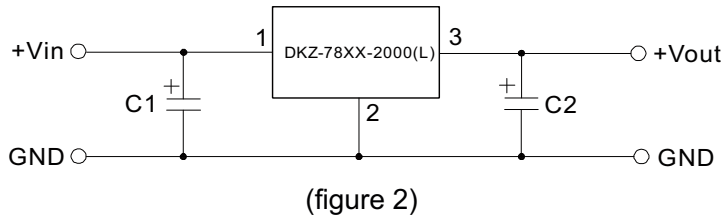


### Note:

1. C1 and C2 are required and should be fitted close to the converter pins.
2. The capacitance of C1 and C2 sees external capacitor table, it can be increased properly if required, and tantalum or low ESR electrolytic capacitors may also suffice.
3. No parallel connection or plug and play.


## INPUT FILTER CIRCUIT CONNECT

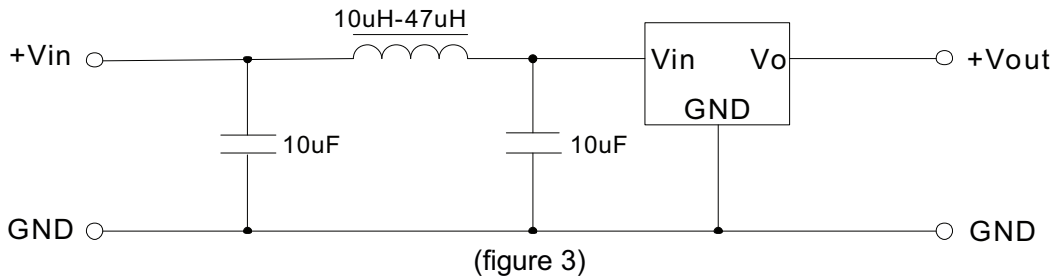

## OUTPUT FILTER CIRCUIT CONNECT

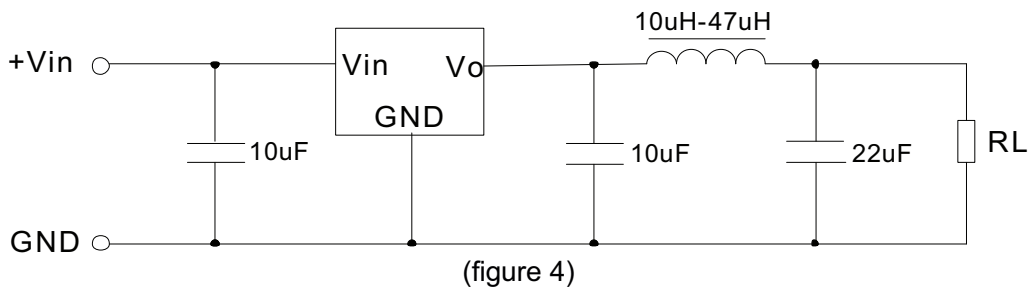


## EMC RECOMMENDED CIRCUIT

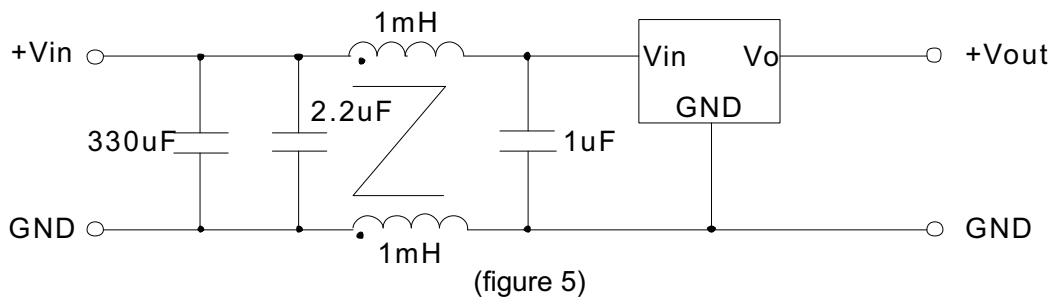


**TEST CONFIGURATIONS (TA=25°C)**

**1 Efficiency and Output Voltage Ripple Test**

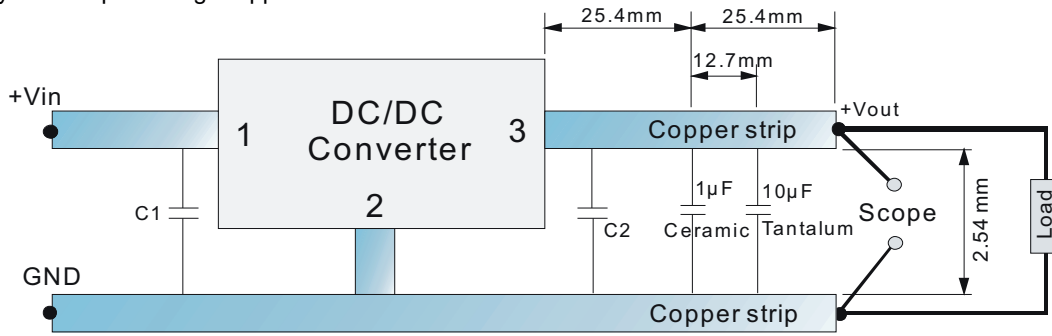

(figure 6)

**2 Start-up and Load Transient Response Test**




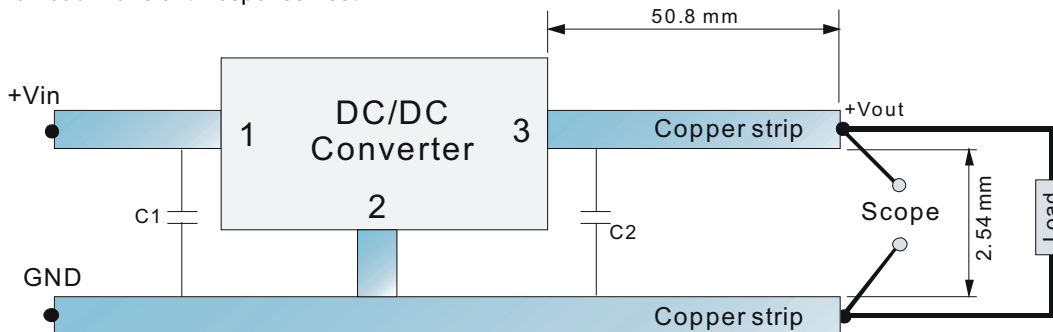


(figure 7)

**CHARACTERISTICS CURVE**

**Efficiency**

**Ripple**

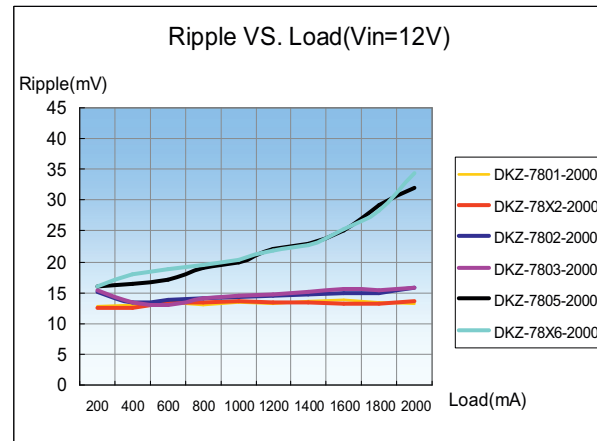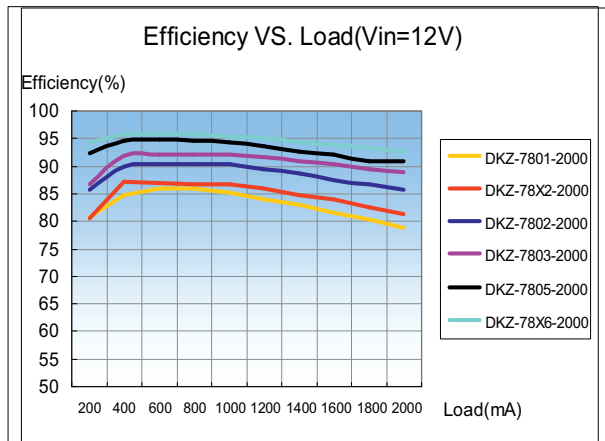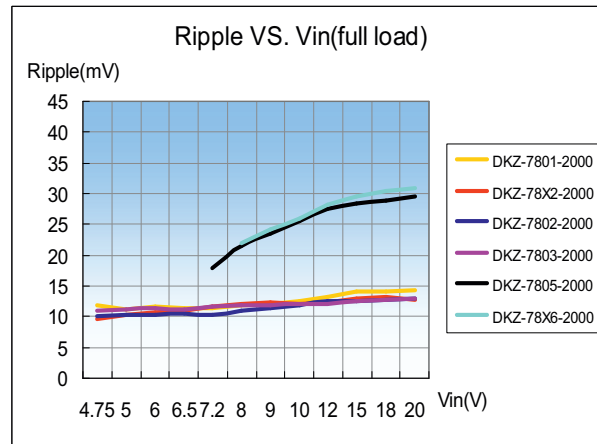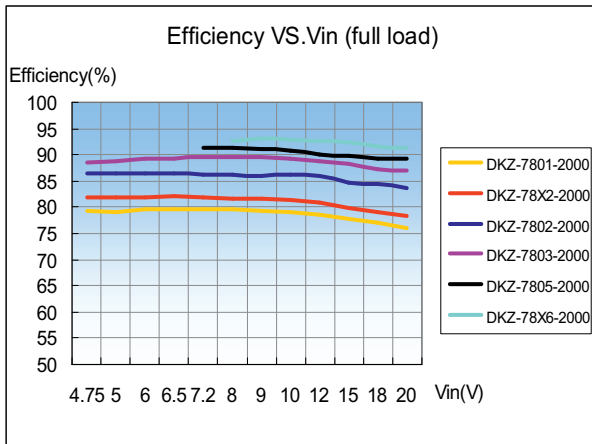

# OUTLINE DIMENSIONS & FOOTPRINT DETAILS

**MECHANICAL DIMENSIONS**

**DKZ-78XX**

(Front View) Dimensions: 17.50 [0.689], 0.50 [0.020], 4.10 [0.161], 5.08 [0.200]

(Bottom View) Dimensions: 11.50 [0.453], 9.00 [0.354], 0.30 [0.012], 0.50 [0.020], 2.15 [0.085]

**DKZ-78XX-L**

(Front View) Dimensions: 19.00 [0.748], 17.50 [0.689], 9.00 [0.354], 0.30 [0.012]

(Bottom View) Dimensions: 11.50 [0.453], 4.10 [0.161], 0.50 [0.020], 5.08 [0.200]

FOOTPRINT DETAILS	
Pin	Function
1	+Vin
2	GND
3	+Vout

Note:  
 Unit: mm[inch]  
 Pin section tolerances:  $\pm 0.10$  mm [ $\pm 0.004$  inch]  
 General tolerances:  $\pm 0.25$  mm [ $\pm 0.010$  inch]

**RECOMMENDED FOOTPRINT**

**DKZ-78XX**

$\Phi 1.00$  [0.039]

**DKZ-78XX-L**

$\Phi 1.00$  [0.039]

Note: grid 2.54 \* 2.54mm.

**TUBE OUTLINE DIMENSIONS**

**DKZ-78XX**

Dimensions: 11.60 [0.457], 27.10 [1.067], 20.60 [0.811], 6.60 [0.260]

**DKZ-78XX-L**

Dimensions: 11.40 [0.449], 23.40 [0.921], 20.40 [0.803], 4.20 [0.205], 11.00 [0.433], 16.00 [0.630]

Note:  
 Unit: mm[inch]  
 General tolerances:  $\pm 0.50$  mm [ $\pm 0.020$  inch]  
 L=530mm [20.866inch] Devices per tube quantity: 44pcs  
 L=220mm [8.661inch] Devices per tube quantity: 17pcs  
 Short tube inner packaging dimensions: L\*W\*H=255\*170 \*80mm  
 Short tube outer packaging dimensions (with six inner packaging boxes):  
 L\*W\*H=375\*280\*270mm  
 Long tube inner packaging dimensions: L\*W\*H=580\*200\*100mm  
 Long tube outer packaging dimensions (with two inner packaging boxes):  
 L\*W\*H=600\*215\*220mm  
 Long tube outer packaging dimensions (with three inner packaging boxes):  
 L\*W\*H=600\*215\*325mm

**Note:**

1. All specifications measured at TA=25°C, humidity <75%, nominal input voltage and rated output load unless otherwise specified.
2. Only typical models listed, other models may be different, please contact our technical person for more details.
3. in this datasheet, all the test methods of indications are based on corporate standards.